Bulkhead

X-CS3

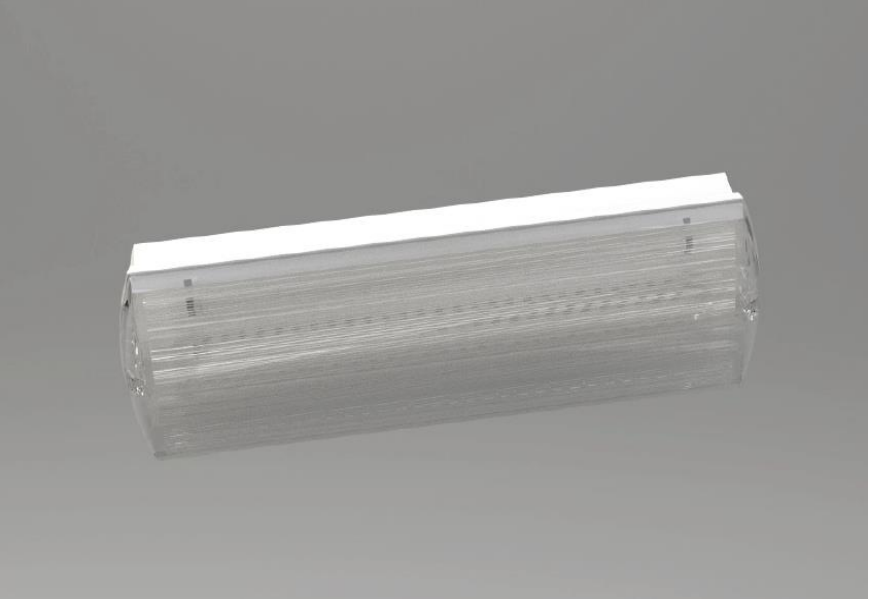

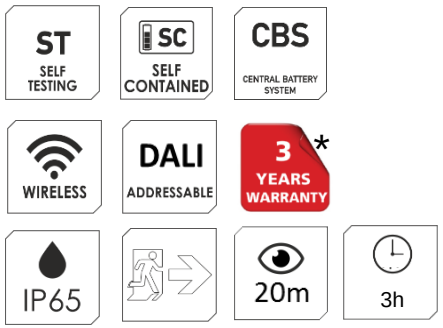

This compact, multi-functional Bulkhead can be tailored for many different options and uses. Suitable for internal and external environments, it can be customised for any wiring situation.

- ✓ Self-testing of battery and LED operation as standard
- ✓ Surface mount
- ✓ High output LED light source
- ✓ IP65
- ✓ DALI option
- ✓ Central Battery and Static inverter systems
- ✓ Alternative colour & finish options
- ✓ 0°C + 25°C operating temperature

Power Specs -
300 Lumens / 3.7W 0.93PF @ 230V AC

Viewing distance: 20 metres

X-CS3 Options	
/ST	Self-test
/DALI	DALI (Addressable)
/IP	Wireless Communication
/SL/24	24V AC/DC (central battery)
/SL/50	50V AC/DC (central battery)
/SL/110	110V AC/DC (central battery)
/SL/230	230V AC/DC (static inverter)
/HO	50-230V AC/DC hold off relay
/PC	Photo cell
/BK	Black Finish Base
/BEZ/R	Semi recess kit
ULK	Universal Legend Kit

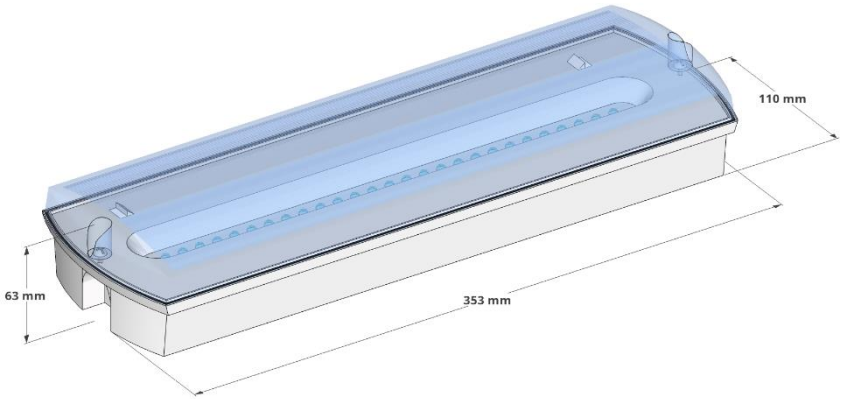

Ringtail Lighting maintains a policy of continuous development and reserves the right to change the details shown on this data sheet without notice. The contents are intended for guidance only.

FM 582596